


elements INS 4(GC050-#15)

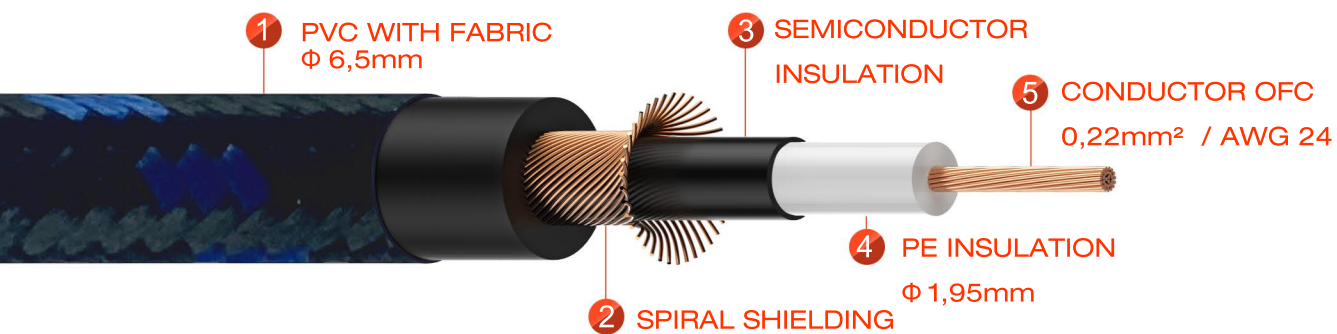

TECHNICAL DATA:

- | | |
|-------------------------------|---|
| • Jacket,diameter | PVC with fabric Φ 6,5mm |
| • AWG | 24 |
| • No. of inner conductors | 1x0,22mm ² |
| • Copper strand per conductor | 28x0,10mm |
| • Conductor insulation | PE Φ 1,95mm |
| • Shielding | copper spiral shielding
with 48x0,10mm+semiconductor |
| • Shielding factor | 100% |
| • Temperature range | min. -20°C |
| • Temperature range | max. +70°C |

ELECTRICAL DATA:

- | | |
|-------------------------------|---------------|
| • Capac. cond./shield.per 1 m | <85 pF |
| • Cond. resistance per 1 km | <90 Ω |
| • Insulation resist.per 1 km | >1 G Ω |